


The Part Number:

3-25SHB1014H



Technical Data	
Max Temperature (°F)	158 °F
Max Operating Pressure	8 Bars (115 PSI)
Recommended Average Operating Pressure	<6 Bar (88 PSI)
Cycle Test	122 °F
Burst Test	440 PSI

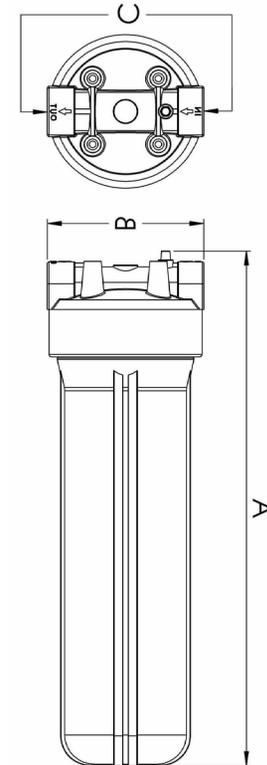

PRODUCT NAME: Filter Housing

RAW MATERIAL:

- Blue Sump** - Polypropylene
- Clear Sump** - Styrene Acrylonitrile (SAN)
- Cap** - Reinforced Polypropylene

DIMENSION:

- Standard Size:** 2.5 in x 5 in, 10 in, 20 in
- Jumbo Size:** 4.5 in x 10 in, 20 in

FEATURES & BENEFITS:

- NSF certified
- Equipped with a black, reinforced polypropylene cap
- Standard pressure relief/bleed button on inlet side of cap
- Dual leak-proof seal
- Available with opaque sumps

APPLICATIONS:

- Under-sink and counter top residential filtration
- Pre and post reverse osmosis filtration
- Recreational vehicle filtration
- Food service filtration
- Humidifying systems

Housing	A	B	Weight
2.5 x 10	12.75 in	4.75 in	2 lbs.
2.5 x 20	22.75 in	5 in	4 lbs.
4.5 x 10	13.75 in	7.25 in	5 lbs.
4.5 x 20	24 in	7.25 in	9 lbs.