




The Part Number:

2-251001-GMB

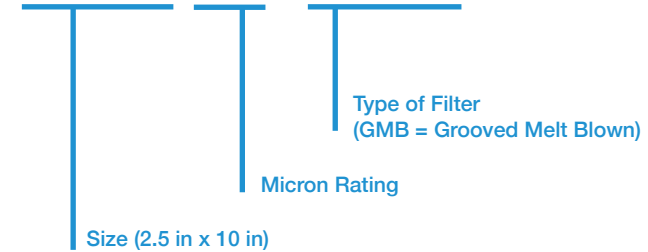

PRODUCT NAME: Grooved Melt Blown Sediment Filter

RAW MATERIAL: PP - Polypropylene

FILTRATION PRECISION: 1, 5, 10, 20, 50 Micron

DIMENSION: 2.5 in x 10 in

- FEATURES & BENEFITS:**
- Grooved design increases surface filtration area
 - Depth filter cartridge is constructed of quality polypropylene filter media to ensure high efficiency in the inner layer
 - Thermal bonded micro-fiber construction offers consistent flow rates as well as superior filtration performance
 - No fiber releases
 - High dirt holding capacity
 - Materials are FDA listed as acceptable for potable and edible
 - Available in a wide selection of micron ratings from 1 μm to 100 μm

APPLICATIONS:

- Drinking water treatment, pre-filtration for RO+DI, acid & lye filtration in electronic industry, platings, high technology coatings, chemicals, and solvents

Average Flow Rates (Gallons Per Minute)

Filter Size	1 Micron	5 Microns	10 Microns	20 Microns	50 Microns
2.5 in x 10 in	3.91 GPM	4.06 GPM	4.2 GPM	4.35 GPM	4.46 GPM

Technical Data

Max Operating Temperature (°F)	176
Max Feed Pressure Resistance (PSI)	100

Pressure Drop 1 PSI

True Dimensions

