

- PRODUCT NAME:** Activated Carbon Block CTO Filter Cartridge
- RAW MATERIAL:** Coconut Activated Carbon
- FILTRATION PRECISION:** 1, 5, 10, 20, 50 Micron
- DIMENSION:** **Standard Size:** 2.5 in x 5 in, 10 in, 20 in
Jumbo Size: 4.5 in x 10 in, 20 in
- FEATURES & BENEFITS:**
- Provides effective chlorine, taste, sediment, and odor reduction
 - Made of 100% coconut shell carbon
 - Unique design reduces carbon fines in filtered water
 - Durable polypropylene end caps
 - Uses NSF certified materials
- APPLICATIONS:**
- Whole-house filtration
 - Point of entry (POE) filtration
 - Point of use (POU) RO systems
 - Commercial RO pretreatment
 - High-flow applications
 - Chlorine removal
 - Color removal
 - Odor removal

The Part Number:

2-250501-AC




Average Flow Rates (Gallons Per Minute)

Filter Size	1 Micron	5 Microns	10 Microns	20 Microns	50 Microns
2.5 in x 5 in	5.95 GPM	6.05 GPM	6.25 GPM	6.4 GPM	6.5 GPM
2.5 in x 10 in	11.9 GPM	12.1 GPM	12.5 GPM	12.8 GPM	13.0 GPM
2.5 in x 20 in	23.8 GPM	24.2 GPM	25.0 GPM	25.6 GPM	26.0 GPM
4.5 in x 10 in	34.6 GPM	34.8 GPM	35.1 GPM	35.5 GPM	35.7 GPM
4.5 in x 20 in	69.2 GPM	69.6 GPM	70.2 GPM	71.0 GPM	71.4 GPM

Technical Data

Max Operating Temperature (°F)	176
Max Feed Pressure Resistance (PSI)	100

Pressure Drop 1 PSI

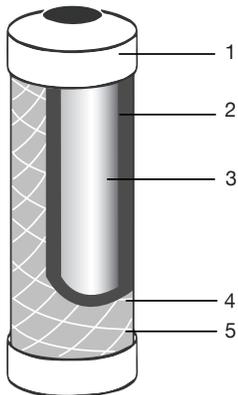

- 1: PP end cap with PVC seal gasket
- 2: Activated Carbon Block
- 3: PP non-woven fabric
- 4: PP non-woven fabric
- 5: PP Net

True Dimensions

