
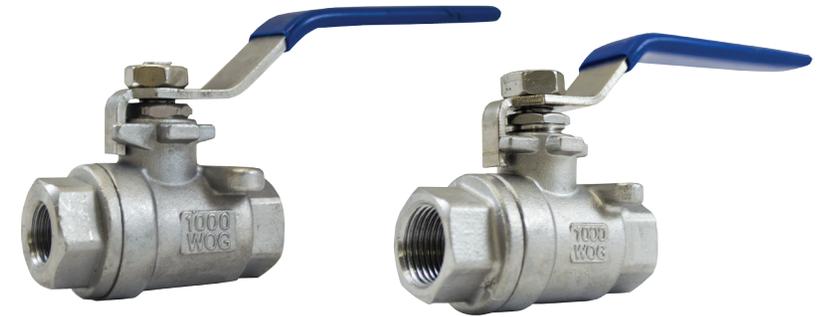



The Part Number:

4-304V14F

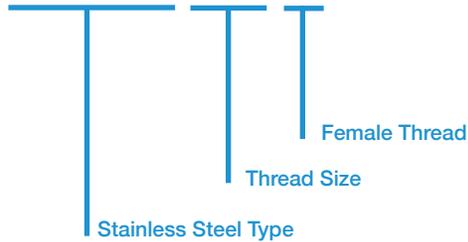

- PRODUCT NAME:** Stainless Steel Ball Valve
- RAW MATERIAL:** **304 Stainless Steel** - Nut, Spring Washer, Stem, Handle, Gland Nut, Bonnet, Ball, Body
PTFE (Teflon) - Packing, Thrust Washer, Seal Ring, Seat
- SIZES:** 1/4 in, 3/8 in, 1/2 in, 3/4 in, 1 in
- FEATURES & BENEFITS:**
- Two piece ball valve
 - Suited for industrial use
- APPLICATIONS:**
- Water
 - Oil
 - Biodiesel
 - Air
 - Other Fluids

DIMENSIONS:

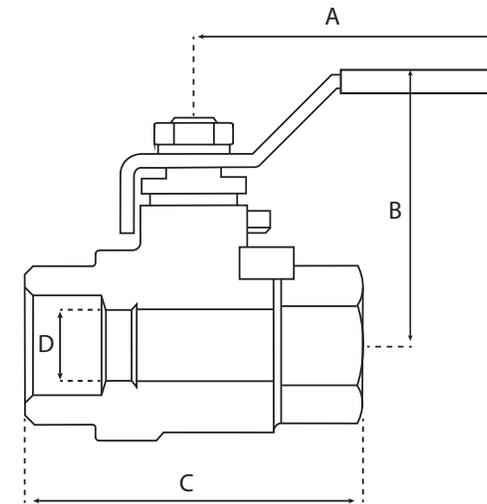

Specifications	
Max Working Temperature	-29 °C to 210 °C (-20 °F to 410 °F)
Nominal Working Pressure	1000 psi
Shell Test Pressure	10.4 Mpa (1500 psi)
Tightness Test Pressure	7.6 Mpa (1100 psi)
Gas Tightness Test Pressure	0.4~0.7 Mpa (58~100 psi)
Port Types	Female NPT x Female NPT

	A	B	C	D	Weight
1/4 in	3.7 in	1.8 in	2.0 in	0.5 in	.50 lb
3/8 in	3.7 in	1.8 in	2.0 in	0.5 in	.45 lb
1/2 in	3.9 in	2.0 in	2.4 in	0.6 in	.64 lb
3/4 in	4.5 in	2.3 in	2.8 in	0.8 in	0.98 lb
1 in	4.9 in	2.6 in	3.3 in	1.0 in	1.57 lb